

FORM PTO-1390 (Modified)
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

705/72449-2

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/554888

INTERNATIONAL APPLICATION NO.

PCT/EP98/07735

INTERNATIONAL FILING DATE

November 30, 1998

PRIORITY DATE CLAIMED

November 28, 1997

TITLE OF INVENTION

A WIND POWER PLANT

APPLICANT(S) FOR DO/EO/US

Mats LEIJON; and Gunnar KYLANDER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☐ Certificate of Mailing by Express Mail
19. ☐ Other items or information:

526 Rec'd PCT/PTO 22 MAY 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	PATENT
)	
Mats LEIJON et al.)	Group: To Be Assigned
)	
Serial No.: New Application based on)	Examiner: To Be Assigned
PCT/EP98/07735)	
)	
Filed: May 22, 2000)	
)	
A WIND POWER PLANT)	

* * * * *

PRELIMINARY AMENDMENT

Washington, D.C.
May 22, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to initial examination on the merits, please amend the above-identified application as follows:

IN THE CLAIMS:

Claim 1. (Amended) A wind power plant comprising at least one high voltage rotary generator coupled to a turbine [(102)] via shaft means [(101)] and having a stator [(3)] with at least one winding and a rotor, [characterised in that] wherein the at least one stator winding is provided with a solid insulation system and is arranged to be directly connected via coupling elements [(109)] to a transmission or distribution network [(110)] having a voltage of between 2 and 50 kv, preferably higher than 10 kv.

Claim 2. (Amended) [A] The plant as claimed in claim 1, [characterised in that] wherein the or each stator winding comprises a cable [(6)] intended for high voltage comprising one or more current carrying conductors [(31)] surrounded by said solid insulation system.

Claim 3. (Amended) [A] The plant as claimed in claim 2, [characterised in that] wherein the solid insulation system comprises at least two spaced apart semiconducting layers each providing essentially an equipotential surface, and an intermediate insulating layer between the semiconducting layers having substantially the same coefficient of thermal expansion as at least one of the semiconducting layers.

Claim 4. (Amended) [A] The plant as claimed in claim 3, [characterised in that] wherein the innermost semiconducting layer [(32)] is at substantially the same potential as the [said] conductor(s) [(31)].

Claim 5. (Amended) [A] The plant as claimed in [either claim 3 or claim 4, characterised in that] claim 3 wherein the outer semiconducting layer [(34)] is arranged to form essentially an equipotential surface surrounding the conductor(s) [(31)].

Claim 6. (Amended) [A] The plant as claimed in claim 5, [characterised in that] wherein said outer semiconducting layer [(34)] is connected to a predefined potential.

Claim 7. (Amended) [A] The plant as claimed in claim 6, [characterised in that] the predefined potential is earth potential.

Claim 8. (Amended) [A] The plant as claimed in [any one of claims 3 to 7, characterised in that] claim 3 wherein the current-carrying conductors comprise a plurality of electrically insulated strands and at least one uninsulated strand.

Claim 9. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1, wherein the rotor [(2)] is equipped with a short-circuited winding, resulting in a generator of the induction type.

Claim 10. (Amended) [A] The plant as claimed in [any one of claims 1 to 8, characterised in that] claim 1, wherein the rotor [(2)] is equipped with a field winding in which DC-current flows, resulting in a generator of the synchronous type.

Claim 11. (Amended) [A] the plant as claimed in [any one of claims 2 to 10, characterised in that] claim 1, wherein the cables [(6)] with solid insulation have a conductor area of between 10 and 200 mm² and have an outer cable diameter of between 10 and 40 mm.

Claim 12. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1, wherein the said generator [(100)] is designed for high voltage and is arranged to supply the out-going electric network [(110)] directly without any intermediate connection of a transformer.

Claim 13. (Amended) [A] The plant as claimed in claim 12, [characterised in that] wherein said generator [(100)] is earthed via an impedance [(103)].

Claim 14. (Amended) [A] The plant as claimed in claim 12, [characterised in that] wherein said generator [(100)] is directly earthed.

Claim 15. (Amended) [A] The plant as claimed claim 12, [characterised in that] wherein the generator is arranged to generate power to various voltage levels.

Claim 16. (Amended) [A] The plant as claimed claim 15, [characterised in that] wherein one of said voltage levels is arranged to generate auxiliary power and that the auxiliary power is arranged to be generated from a separate winding [(119;113)] in the generator [(100)].

Claim 17. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1 wherein it comprises several generators, each of which lacks an individual step-up transformer, but which, via a system transformer common to the generators, is connected to the transmission or distribution network.

Claim 18. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1 wherein the winding of the or each generator is arranged for self-regulating field control and lacks auxiliary means for control of the field.

Claim 19. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1 wherein the windings of the or each generator can be connected for multiple-speed operation using different numbers of pole [poles e.g. Dahlander-coupling].

Claim 20. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1 wherein at least one wind turbine is equipped with two or more generators having different numbers of poles so that multiple-speed operation is possible.

Claim 21. (Amended) [A] The plant as claimed in [any one of the preceding claims, characterised in that] claim 1 wherein the or each generator is connected to a frequency convertor comprising a rectifier, a DC-link and an inverter.

Claim 22. (Amended) [A] The plant as claimed in claim 21, [characterised in that] wherein series connected valves are used in the inverter and the rectifier.

Claim 23. (Amended) [A] The plant as claimed in claim 22, [characterised in that] wherein the inverter is net commutated with current-stiff DC- link.

Claim 24. (Amended) [A] The plant as claimed in claim 22, [characterised in that] wherein the inverter is self commutated and consists of series-connected IGBTs.

Claim 25. (Amended) An electric generator [(100)] for high voltage included in a wind power plant in which the generator is coupled to a turbine [(102)] via shaft means [(101)], said generator [(100)] comprising a stator with at least one stator winding and a rotor, [characterised in that] wherein the at least one stator winding is provided with solid insulation and in that each winding is arranged to be directly connected via coupling elements [(109)] to a transmission or distribution network [(110)] having a voltage of between 2 and 50 kV1 preferably higher than 10 kv.

Claim 26. (Amended) [A] The generator as claimed in claim 25, [characterised in that] wherein it includes the features defined for the generator included in the plant [as claimed in any one of claims 2 to 24].


Please delete all multiple dependencies. If any multiple dependencies remain in the claims, it is respectfully requested that said multiple dependencies be deleted and reference be made to the immediately preceding claim.

REMARKS

The application has been amended in order to delete the multiple dependencies from the claims and to place the application in better format according to U.S. practice.

Examination on the merits is earnestly solicited.

Respectfully submitted,

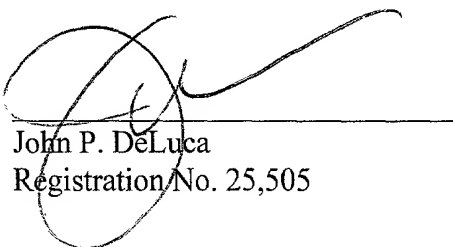

John P. DeLuca
Registration No. 25,505

WATSON COLE GRINDLE WATSON, P.L.L.C.
1400 K Street, NW, 10th Floor
Washington, D.C. 20005-2477
(202) 628-3600
JPD/er

A WIND POWER PLANTTechnical field

This invention relates to a wind power plant of the type described in the preamble of claim 1 and which is intended for connection to distribution or transmission networks, hereinafter called power networks. The invention also relates to an electric generator for high voltage in a wind power station intended for the above-mentioned purpose. The invention further relates to a variable speed system containing the above-mentioned generator.

Background art

A wind power plant can be a single grid-connected unit but usually consists of a number of wind turbines forming a wind power farm. Each wind turbine is equipped with an electric generator located in a hub. The generator can be synchronous or of the induction type. Induction generators are more common today because they are cheaper and more robust. The synchronous generator can produce reactive power which is an advantage over the induction machine. The size of the wind turbine is today typically 100 - 3000 kW with many commercial turbines around 500 kW. The trend is for higher power and voltage of the generator. The voltage levels of today are from 400 V up to a few kV. In most wind farms, it is necessary to equip each wind turbine with a transformer that steps up the voltage to a local distribution voltage that may be typically 10-30 kV. Thus this transformer and the generator constitute integrated parts of a plant. Individual units are interconnected in tree branch or ring networks with high-voltage cables. The distribution network may be connected to a transmission network by a single or a couple of power transformers. The transformers entail an extra cost and also have the drawback that the total efficiency of the

- 2 -

system is reduced. They are also a fire hazard since they contain transformer oil which can leak out in the event of failure or vandalism.

If, therefore, it were possible to manufacture
5 electric generators for considerably higher voltages, at least the distribution transformer could be eliminated. It is possible with today's generator technology to make a 10 kV generator and thus eliminate the distribution transformer, but the cost would be far higher than a more
10 typical 660 V machine. Furthermore today's stator winding insulation technology is sensitive to temperature variations, humidity and salt that a wind turbine generator may be exposed to. This makes it unrealistic with today's technology to dispose of the distribution transformers.

15 A high-voltage generator has a magnetic circuit that comprise a laminated core, e.g. of sheet steel with a welded construction. To provide ventilation and cooling the core is often divided into stacks with radial and/or axial ventilation ducts. The winding of the magnetic circuit is
20 disposed in slots in the core, the slots generally having a cross section in the shape of a rectangle or trapezium.

In multi-phase high-voltage electric generators the windings are made as either single or double layer windings. With single layer windings there is only one coil side per
25 slot, whereas with double layer windings there are two coil sides per slot. By "coil side" is meant one or more conductors combined vertically or horizontally and provided with a common coil insulation, i.e. an insulation designed to withstand the rated voltage of the generator to earth.

30 Double-layer windings are generally made as diamond windings whereas single layer windings in the present context can be made as diamond or flat windings. Only one (possibly two) coil width exists in diamond windings whereas flat windings are made as concentric windings, i.e. with a
35 widely varying coil width. By "coil width" is meant the

- 3 -

distance in arc dimension between two coil sides pertaining to the same coil.

Normally all large machines are made with double-layer windings and coils of the same size. Each coil is placed with one side in one layer and the other side in the other layer. This means that all coils cross each other in the coil end. If there are more than two layers these crossings complicate the winding work and the coil end is less satisfactory.

10 It is considered that coils for rotating generators can be manufactured with good results within a voltage range of 3 - 20 kV.

In theory, it is known how to obtain larger voltage levels. Such generators are described, for instance, in 15 US-A-4429244, US-A-4164672 and US-A-3743867. However, the machine designs according to the above publications do not permit optimal utilization of the electromagnetic material in the stator.

There are also wind turbines that operate at variable turbine speed. This operation mode is advantageous because the aerodynamic efficiency can be maximized. Variable speed systems employ two generators with different numbers of poles or generators with windings that can be connected for two-speed operation. Variable speed can also be obtained by means of a frequency converter. A variable speed system is simplified when a synchronous generator is used because a simple diode rectifier can be used between generator and DC-link. The two most common inverter types are line-commutated and force-commutated. These two types of 20 inverters produce different types of harmonics and hence require different line filters. The line-commutated inverter is equipped with thyristors which produces harmonic current that are turned into voltage harmonics on the grid. To eliminate these harmonics a large grid filter must be 35 used. Another drawback is that the line-commutated inverter

- 4 -

consumes reactive power. A force-commutated inverter can create its own three-phase voltage system and if the inverter is connected to the grid it can freely choose which power factor to use and in which direction the power should be directed. By the use of Pulse Width Modulation, PWM, the low frequency harmonics are eliminated and the first harmonics have a frequency around the switching frequency of the inverter. The most interesting valve for a PWM inverter is the Insulated Gate Bipolar Transistor, IGBT. With the latest IGBT-valves, a switching frequency of from 5 to 10 kHz would be used. Today's IGBT valves are limited in voltage and power so that a single six-pulse inverter can handle about 1 MVA at 1-2 kV.

Description of the invention

The object of the invention is thus to provide an electric generator which can be used in a wind power plant for such high voltage that the distribution transformer can be omitted, i.e. a plant in which the electric generators are intended for considerably higher voltages than conventional machines of corresponding type, in order to be able to execute direct connection to power networks at all types of high voltages, in particular exceeding the 20 kV considered as an upper limit today. Another object of the invention is to provide an electric generator that is not sensitive to salt, humidity or temperature variations, as are present known high-voltage windings. A third object of the invention is to provide a variable speed alternative for the resulting high voltage if the distribution transformer is eliminated.

According to one aspect of the present invention there is provided a wind power plant as claimed in the ensuing claim 1.

By use of solid insulation in combination with the other features defined, the network can be supplied without the use of an intermediate step-up transformer even at

- 5 -

network voltages considerably in excess of 20 kV. Furthermore, this insulation is completely insensitive to salt, humidity and temperature variations. The elimination of the transformer entails great savings and also results in
5 several other simplifications and savings.

Wind power plants are often arranged in farmland and close to populated areas. In a conventional wind power plant the transformer must be protected from causing hazard by explosion risk or leaking oil. A concrete transformer
10 station may have to be built at the foundation of each wind turbine unit. In future offshore locations it would be difficult and costly to repair and maintain the transformer. Thus if the transformer is eliminated, the transformer housing is eliminated and it is also possible to use thinner
15 cables to the generator. Furthermore the reactive power consumption and the electrical losses of the transformer are eliminated. The removal of the transformer also eliminates a set of breaker units previously necessary between the transformer and the generator.

20 The plant according to the invention also enables several connections with different voltage levels to be arranged, i.e. the invention can be used for all auxiliary power in the power station. Another way to supply auxiliary power to each wind turbine is to have a cheap low-voltage
25 network in parallel with the distribution network.

According to another aspect of the present invention there is provided an electric generator as claimed in the ensuing claim 25.

In a particularly preferred embodiment of the plant
30 and generator respectively, the solid insulation system comprises at least two spaced apart layers, e.g. semiconducting layers, each layer constituting essentially an equipotential surface, and an intermediate solid insulation therebetween, at least one of the layers having

- 6 -

substantially the same coefficient of thermal expansion as the solid insulation.

This embodiment constitutes an expedient embodiment of the solid insulation that in an optimal manner enables
5 the windings to be directly connected to the high-voltage network and where harmonization of the coefficients of thermal expansion eliminates the risk of defects, cracks or the like upon thermal movement in the winding.

It should be evident that the windings and the
10 insulating layers are flexible so that they can be bent. It should also be pointed out that the plant according to the invention can be constructed using either horizontal or vertical generators.

The above and other preferred embodiments of the
15 invention are defined in the dependent claims.

A major and essential difference between known technology and the embodiment according to the invention is that an electric generator with a magnetic circuit is arranged to be directly connected via only breakers and
20 isolators, to a high supply voltage, typically in the vicinity of between 2 and 50 kV, preferably higher than 10 kV. The magnetic circuit comprises a laminated core having at least one winding consisting of a threaded cable with one or more permanently insulated conductors having a
25 semiconducting layer both at the conductor and outside the insulation, the outer semiconducting layer being connected to earth potential.

To solve the problems arising with direct connection of electric machines to all types of high-voltage power
30 networks, the generator in the plant according to the invention has a number of features as mentioned above, which differ distinctly from known technology. Additional features and further embodiments are defined in the dependent claims and are discussed in the following.

- 7 -

Such features mentioned above and other essential characteristics of the generator and thus of the wind-power plant according to the invention include the following:

- The winding of the magnetic circuit is produced from a cable having one or more permanently insulated conductors with a semiconducting layer at both conductor and sheath. Some typical conductors of this type are XLPE cable or a cable with EP rubber insulation which, however, for the present purpose are further developed both as regards the strands in the conductor and the nature of the outer sheath.
- Cables with circular cross section are preferred, but cables with some other cross section may be used in order, for instance, to obtain better packing density.
- Such a cable allows the laminated core to be designed according to the invention in a new and optimal way as regards slots and teeth.
- The winding is preferably manufactured with insulation in steps for best utilization of the laminated core.
- The winding is preferably manufactured as a multi-layered, concentric cable winding, thus enabling the number of coil-end intersections to be reduced.
- The slot design is suited to the cross section of the winding cable so that the slots are in the form of a number of cylindrical openings running axially and/or radially outside each other and having an open waist running between the layers of the stator winding.
- The design of the slots is adjusted to the relevant cable cross section and to the stepped insulation of the winding. The stepped insulation allows the magnetic core to have substantially constant tooth width, irrespective of the radial extension.
- The above-mentioned further development as regards the strands entails the winding conductors consisting of a number of impacted strata/layers, i.e. insulated strands that from the point of view of an electric machine, are not necessarily correctly transposed, uninsulated and/or insulated from each other.
- The above-mentioned further development as regards the outer sheath entails that at suitable points along the

- 8 -

length of the conductor, the outer sheath is cut off, each cut partial length being connected directly to earth potential.

The use of a cable of the type described above allows
5 the entire length of the outer sheath of the winding, as well as other parts of the plant, to be kept at earth potential. An important advantage is that the electric field is close to zero within the coil-end region outside the outer semiconducting layer. With earth potential on the
10 outer sheath the electric field need not be controlled. This means that no field concentrations will occur either in the core, in the coil-end regions or in the transition between them.

The mixture of insulated and/or uninsulated impacted
15 strands, or transposed strands, results in low stray losses. The cable for high voltage used in the magnetic circuit winding is constructed of an inner core/conductor with a plurality of strands, at least two semiconducting layers, the innermost being surrounded by an insulating layer, which
20 is in turn surrounded by an outer semiconducting layer having an outer diameter in the order of 10-40 mm and a conductor area in the order of 10-200 mm².

Brief description of the drawings

Embodiments of the invention will now be described in
25 more detail, by way of example only, with particular reference to the accompanying drawings, in which

Figure 1 is a schematic axial end view of a sector of the stator of an electric generator of a wind power plant according to the invention,

30 Figure 2 is an end view, partially stripped, of a cable used in the winding of the stator according to Figure 1,

- 9 -

Figure 3 is a simplified view, partially in section, of a wind-power generator arrangement according to the invention, and

5 Figure 4 is a circuit diagram for the wind-power plant according to the invention,

Description of a Preferred Embodiment

Figure 1 shows part of a stator 1 and rotor 2 of a generator 100 (see Figure 3) of a wind power plant according to the invention. The stator 1 comprises, in conventional
10 manner, a laminated core. Figure 1 shows a sector of the generator corresponding to one pole pitch. From a yoke part 3 of the core situated radially outermost, a number of teeth 4 extend radially in towards the rotor 2 and are separated by slots 5 in which the stator winding is
15 arranged. Cables 6 forming this stator winding, are high-voltage cables which may be of substantially the same type as those used for power distribution, i.e. XLPE (crosslinked polyethylene) cables. One difference is that the outer, mechanically-protective PVC-layer, and the metal screen
20 normally surrounding such power distribution cables are eliminated so that the cable for the present application comprises only the conductor, an insulating layer and at least one semiconducting layer on each side of the insulating layer. The cables 6 are illustrated
25 schematically in Figure 1, only the conducting central part of each cable part or coil side being shown. As can be seen, each slot 5 has a varying cross section with alternating wide parts 7 and narrow parts 8. The wide parts 7 are substantially circular and surround the cabling, the
30 waist parts between these forming narrow parts 8. The waist parts serve to radially fix the position of each cable. The cross section of the slot 5 also narrows radially inwards. This is because the voltage on the cable parts is lower the closer to the radially inner part of the stator 1 they are
35 situated. Thinner cabling can therefore be used there, whereas wider cabling is necessary radially further out. In

- 10 -

the example illustrated cables of three different dimensions are used, arranged in three correspondingly dimensioned sections 51, 52, 53 of slots 5. An auxiliary power winding 9 is arranged furthest out in the slot 5.

5 Figure 2 shows a step-wise stripped end view of a high-voltage cable for use in the present invention. The high-voltage cable 6 comprises one or more conductors 31, each of which comprises a number of strands 36, e.g. of copper, which together form a central conducting means of
10 generally circular cross section. These conductors 31 are arranged in the middle of the high-voltage cable 6 and in the shown embodiment each is surrounded by a part insulation 35. However, it is feasible for the part insulation 35 to be omitted on one of the conductors 31. In the present
15 embodiment of the invention the conductors 31 are together surrounded by a first semiconducting layer 32. Around this first semiconducting layer 32 is a solid insulating layer 33, e.g. XLPE insulation, which is in turn surrounded by a second semiconducting layer 34. Thus the concept "high-
20 voltage cable" in this application need not include any metallic screen or outer PVC-layer of the type that normally surrounds such a cable for power distribution.

A wind-power plant with a magnetic circuit of the type described above is shown in Figure 3 where the
25 generator 100 is driven by a wind turbine 102 via a shaft 101 and a gearbox 114. The stator 1 of the generator 100 carries stator windings 10 which are built up of the cable 6 described above. The cable 6 is unscreened and changes to a screened cable 11 at cable splicing 9.

30 Figure 4 illustrates a wind power plant according to the present invention. In conventional manner, the generator 100 has an excitation winding 112 and one (or more) auxiliary power winding(s) 113. In the illustrated embodiment of the plant according to the invention the
35 generator 100 is Y-connected and the neutral earthed via an impedance 103. It can also be seen from Figure 4 that the

- 11 -

generator 100 is electrically connected via the cable splicing 9 to the screened cable 11 (see also Figure 3). In some cases it would be possible to omit the cable splicing and let the generator cable extend down the tower of the wind turbine. The cable 11 is provided with current transformers 104 in conventional manner, and terminates at 105. After this point 105 the electric plant in the embodiment shown continues with busbars 106 having branches with voltage transformers 107 and surge arresters 108. However, the main electric supply takes place via the busbars 106 directly to the distribution or transmission network 110 via isolator 109 and circuit-breaker 111.

Although the generator and the plant in which this generator is included have been described and illustrated in connection with an embodiment by way of example, it should be obvious to one skilled in that art that several modifications are possible without departing from the inventive concept. The gearing may be omitted if using a low-speed generator. The generator may be earthed directly without any impedance. The auxiliary windings can be omitted, as also can other components shown. Although the invention has been exemplified with a three-phase plant, the number of phases may be more or less. The generator can be connected to the grid via a frequency convertor containing a rectifier, a DC-link and an inverter. Unlike conventional variable-speed systems, the valves of the rectifier and inverter would probably have to be series-connected because of the high voltage.

Although it is preferred that the electrical insulation system for the winding should be extruded in position, it is possible to build up an electrical insulation system from tightly wound, overlapping layers of film or sheet-like material. Both the semiconducting layers and the electrically insulating layer can be formed in this manner. An insulation system can be made of an all-synthetic film with inner and outer semiconducting layers or portions made of polymeric thin film of, for example, PP,

- 12 -

PET, LDPE or HDPE with embedded conducting particles, such as carbon black or metallic particles and with an insulating layer or portion between the semiconducting layers or portions.

5 For the lapped concept a sufficiently thin film will have butt gaps smaller than the so-called Paschen minima, thus rendering liquid impregnation unnecessary. A dry, wound multilayer thin film insulation has also good thermal properties.

10 Another example of an electrical insulation system is similar to a conventional cellulose based cable, where a thin cellulose based or synthetic paper or non-woven material is lap wound around a conductor. In this case the semiconducting layers, on either side of an insulating
15 layer, can be made of cellulose paper or non-woven material made from fibres of insulating material and with conducting particles embedded. The insulating layer can be made from the same base material or another material can be used.

 Another example of an insulation system is obtained
20 by combining film and fibrous insulating material, either as a laminate or as co-lapped. An example of this insulation system is the commercially available so-called paper polypropylene laminate, PPLP, but several other combinations of film and fibrous parts are possible. In these systems
25 various impregnations such as mineral oil can be used.

 In this specification "semiconducting material" means a substance which has a considerably lower conductivity than an electric conductor but which does not have such a low conductivity that it is an electric insulator. Suitably,
30 but not essentially, the semiconducting material will have a resistivity of $1 \cdot 10^5$ ohm·cm, preferably 10-500 ohm·cm and most preferably from 10 to 100 ohm·cm, typically 20 ohm·cm.

- 13 -

CLAIMS

1. A wind power plant comprising at least one high voltage rotary generator coupled to a turbine (102) via shaft means (101) and having a stator (3) with at least one winding and a rotor, characterised in that the at least one stator winding is provided with a solid insulation system and is arranged to be directly connected via coupling elements (109) to a transmission or distribution network (110) having a voltage of between 2 and 50 kV, preferably higher than 10 kV.

2. A plant as claimed in claim 1, characterised in that the or each stator winding comprises a cable (6) intended for high voltage comprising one or more current-carrying conductors (31) surrounded by said solid insulation system.

3. A plant as claimed in claim 2, characterised in that the solid insulation system comprises at least two spaced apart semiconducting layers each providing essentially an equipotential surface, and an intermediate insulating layer between the semiconducting layers having substantially the same coefficient of thermal expansion as at least one of the semiconducting layers.

4. A plant as claimed in claim 3, characterised in that the innermost semiconducting layer (32) is at substantially the same potential as the said conductor(s) (31).

5. A plant as claimed in either claim 3 or claim 4, characterised in that the outer semiconducting layer (34) is arranged to form essentially an equipotential surface surrounding the conductor(s) (31).

- 14 -

6. A plant as claimed in claim 5, characterised in that said outer semiconducting layer (34) is connected to a predefined potential.

7. A plant as claimed in claim 6, characterised in
5 that the predefined potential is earth potential.

8. A plant as claimed in any one of claims 3 to 7, characterised in that the current-carrying conductors comprise a plurality of electrically insulated strands and at least one uninsulated strand.

10 9. A plant as claimed in any one of the preceding claims, characterised in that the rotor (2) is equipped with a short-circuited winding, resulting in a generator of the induction type.

10. A plant as claimed in any one of claims 1 to 8,
15 characterised in that the rotor (2) is equipped with a field winding in which DC-current flows, resulting in a generator of the synchronous type.

11. A plant as claimed in any one of claims 2 to 10,
characterised in that the cables (6) with solid insulation
20 have a conductor area of between 10 and 200 mm² and have an outer cable diameter of between 10 and 40 mm.

12. A plant as claimed in any one of the preceding claims, characterised in that the said generator (100) is designed for high voltage and is arranged to supply the out-
25 going electric network (110) directly without any intermediate connection of a transformer.

13. A plant as claimed in claim 12, characterised in that said generator (100) is earthed via an impedance (103).

14. A plant as claimed in claim 12, characterised in
30 that said generator (100) is directly earthed.

- 15 -

15. A plant as claimed claim 12, characterised in that the generator is arranged to generate power to various voltage levels.

16. A plant as claimed claim 15, characterised in
5 that one of said voltage levels is arranged to generate auxiliary power and that the auxiliary power is arranged to be generated from a separate winding (119;113) in the generator (100).

17. A plant as claimed in any one of the preceding
10 claims, characterised in that it comprises several generators, each of which lacks an individual step-up transformer, but which, via a system transformer common to the generators, is connected to the transmission or distribution network.

18. A plant as claimed in any one of the preceding
15 claims, characterised in that the winding of the or each generator is arranged for self-regulating field control and lacks auxiliary means for control of the field.

19. A plant as claimed in any one of the preceding
20 claims, characterised in that the windings of the or each generator can be connected for multiple-speed operation using different numbers of poles, e.g. Dahlander-coupling.

20. A plant as claimed in any one of the preceding
25 claims, characterised in that at least one wind turbine is equipped with two or more generators having different numbers of poles so that multiple-speed operation is possible.

21. A plant as claimed in any one of the preceding
30 claims, characterised in that the or each generator is connected to a frequency convertor comprising a rectifier, a DC-link and an inverter.

- 16 -

22. A plant as claimed in claim 21, characterised in that series connected valves are used in the inverter and the rectifier.

23. A plant as claimed in claim 22, characterised in
5 that the inverter is net commutated with current-stiff DC-link.

24. A plant as claimed in claim 22, characterised in that the inverter is self commutated and consists of series-connected IGBTs.

10 25. An electric generator (100) for high voltage included in a wind power plant in which the generator is coupled to a turbine (102) via shaft means (101), said generator (100) comprising a stator with at least one stator winding and a rotor, characterised in that the at least one
15 stator winding is provided with solid insulation and in that each winding is arranged to be directly connected via coupling elements (109) to a transmission or distribution network (110) having a voltage of between 2 and 50 kV, preferably higher than 10 kV.

20 26. A generator as claimed in claim 25, characterised in that it includes the features defined for the generator included in the plant as claimed in any one of claims 2 to 24.

FIG. 1.

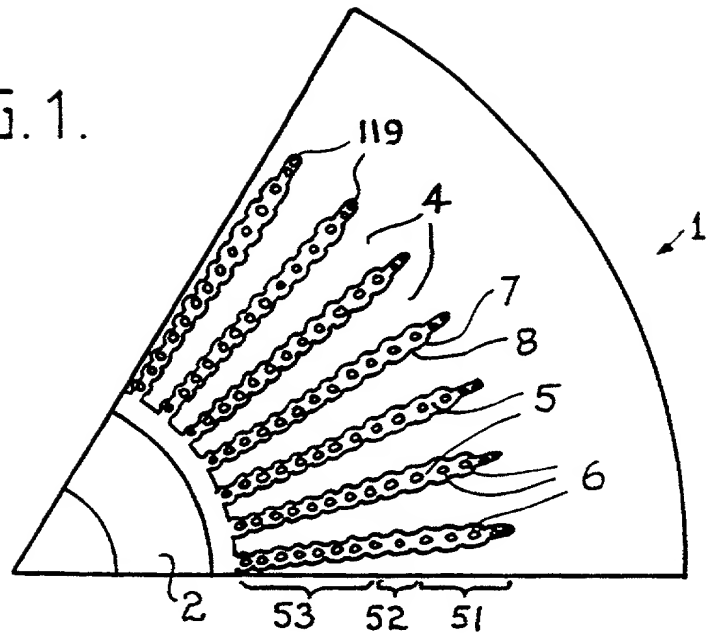
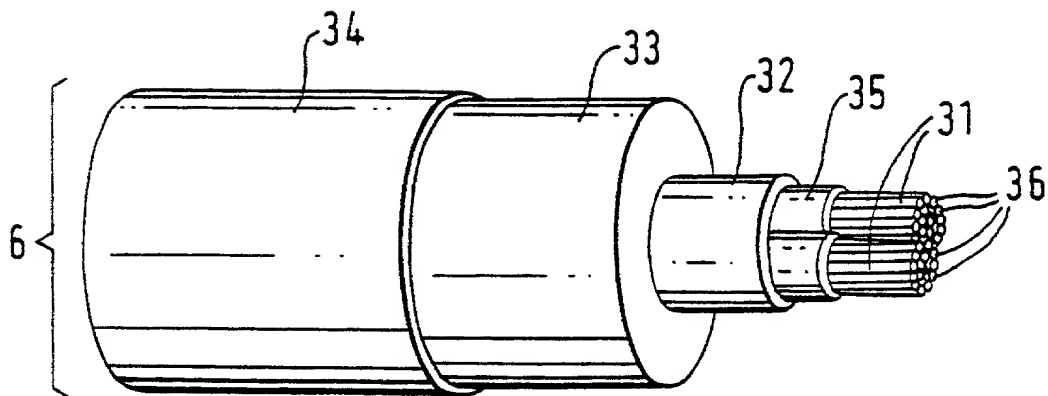


FIG. 2.




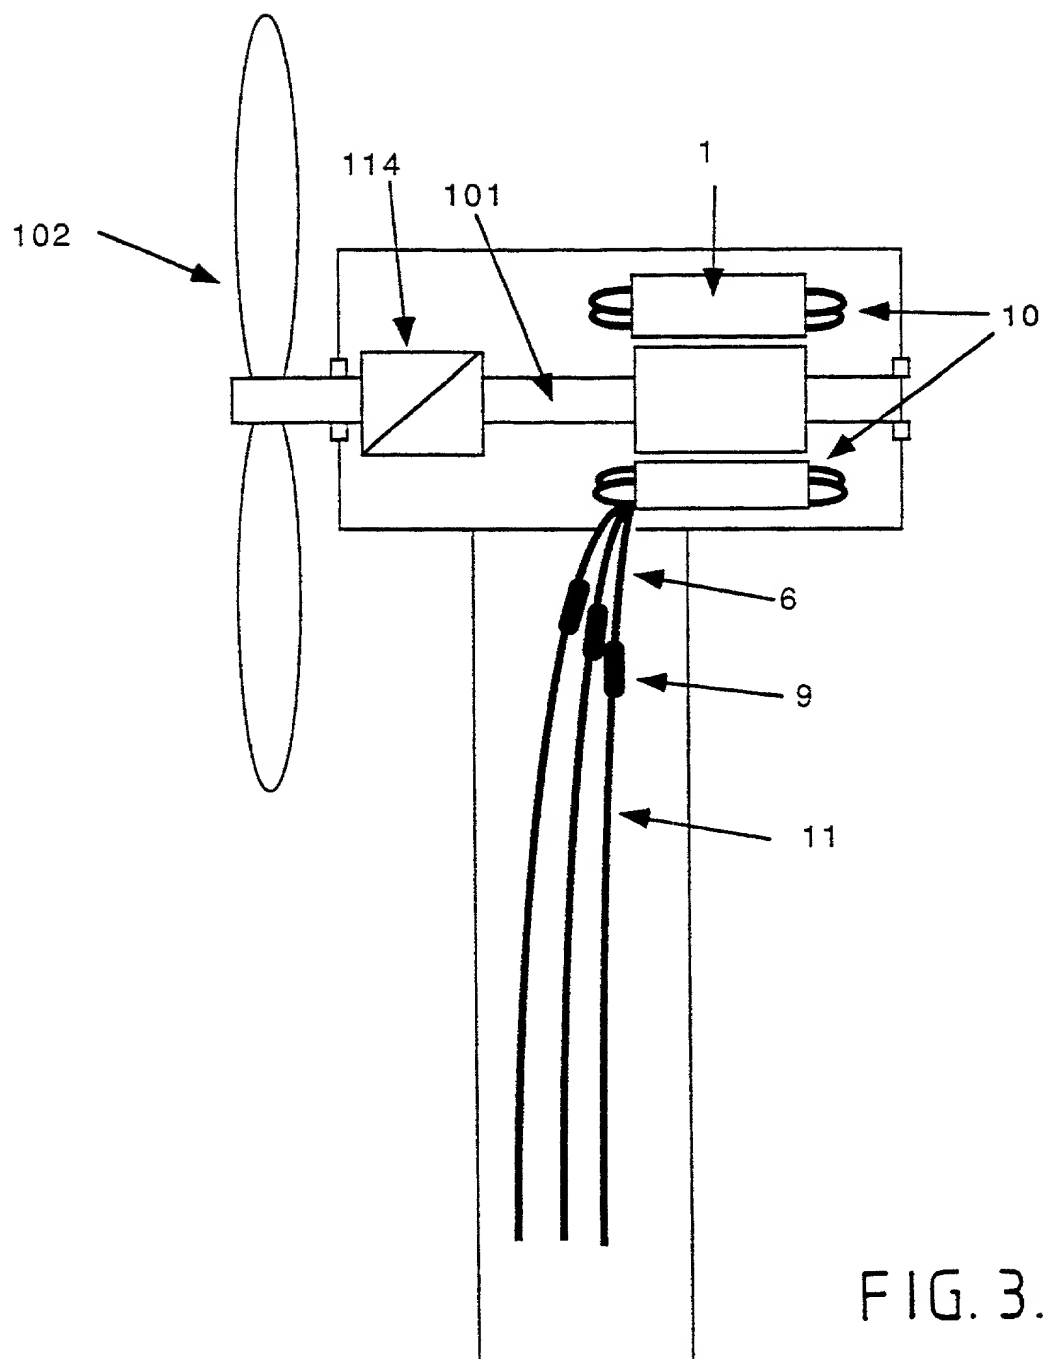


FIG. 4.

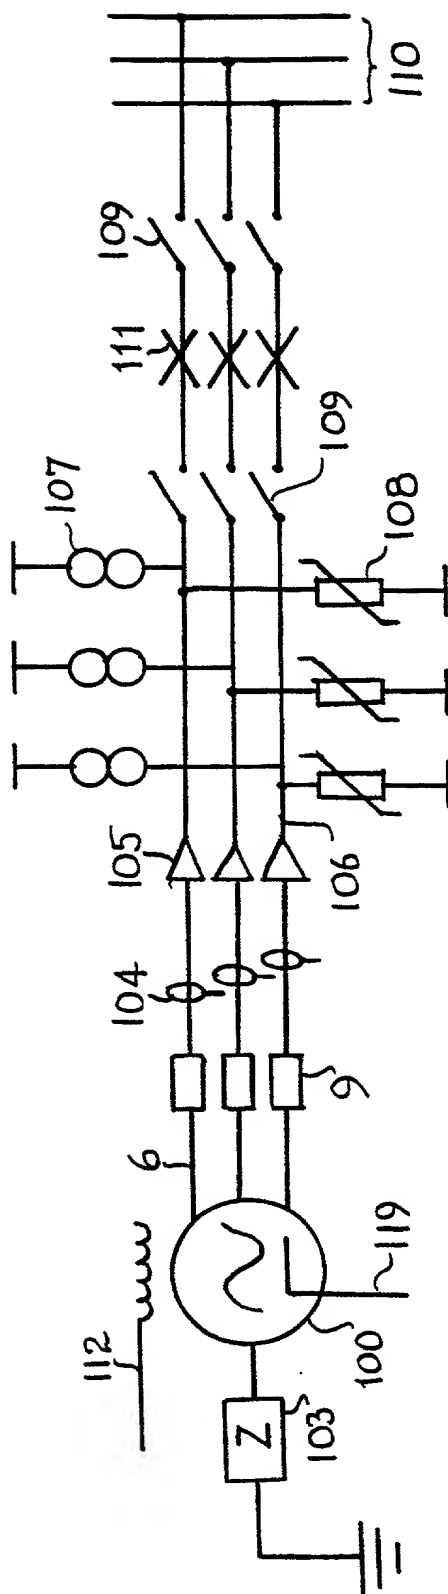

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION (Includes PCT)**

Attorney Docket No.
705/72449-2

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: A WIND POWER PLANT

the specification of which (check one): ☐ is attached hereto.

☐ was filed on _____ amended
on _____.

☒ was filed as PCT international application no. PCT/EP98/07735 on 30 November 1998
and was amended under PCT Article 19 on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I do not know and do not believe the claimed invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>9725309.0</u> (Number)	<u>Great Britain</u> (Country)	<u>28 November 1997</u> Day/Month/Year Filed	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ Day/Month/Year Filed	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119 (e) of any United States provisional application(s) listed below:

_____ Application No.	_____ Day/Month/Year Filed	_____ Application No.	_____ Day/Month/Year Filed
--------------------------	-------------------------------	--------------------------	-------------------------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT International application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No. Filing Date Status (patented, pending, abandoned)

Application Serial No. Filing Date Status (patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith; Watson Cole Grindle Watson, P.L.L.C.; Lawrence R. Radanovic, Reg. No. 23,077; Richard H. Tushin, Reg. No. 27,297; Donald N. Huff, Reg. No. 27,561; John P. DeLuca, Reg. No. 25,505; Walter D. Ames, Reg. No. 17,913; Roy W. Butrum, Reg. No. 18,290 and Michael Bergman, Reg. No. 42,318.

Direct all telephone calls to telephone no. (202) 628-3600 and faxes to (202) 628-3650.

Address all correspondence to Watson Cole Grindle Watson, P.L.L.C., 10th Floor, 1400 K Street, N.W., Washington, D.C. 20005-2477.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole, First Inventor Mats LEIJON	Inventor's Signature <i>[Signature]</i>	Date 28 June 2000
Residence: Hyvlargata 5, S-723 35 Västerås, SWEDEN <i>SE</i>		Nationality Swedish
Post Office Address: Same as Above		
Full Name of Second, Joint Inventor Gunnar KYLANDER	Inventor's Signature <i>[Signature]</i>	Date 28 June 2000
Residence: Stentorpsgatan 16A, S-723 43 Västerås, SWEDEN <i>SE</i>		Citizenship Swedish
Post Office Address: Same As Above		
Full Name of Third, Joint Inventor	Inventor's Signature	Date
Residence:		Citizenship
Post Office Address:		